


Clutch Cover Installation Guide

To ensure even installation and correct functioning of the clutch cover, the bolts must be installed using a torque wrench set to the vehicle manufacturer's recommended cover bolt torque settings for that particular vehicle. Power tools (e.g. air guns) must never be used.

EXEDY Clutch Europe Ltd. recommends using a star pattern to tighten the bolts in order as detailed below (and not just opposite pair tightening) to ensure perfectly even installation and correct movement of the pressure plate during operation.

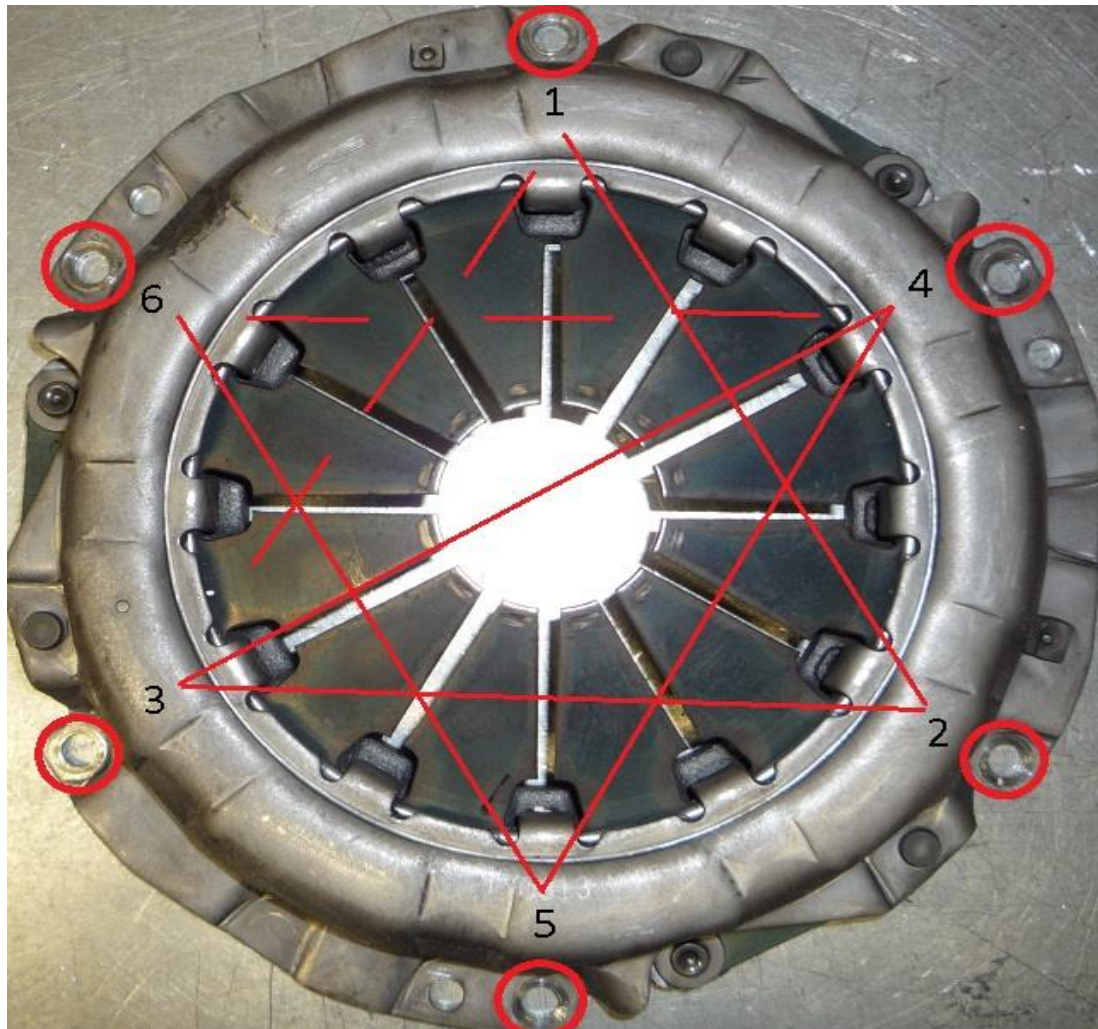

Revised: 04/09/2017 SGC

EXEDY Clutch Europe Ltd
Unit 2, Rokeby Court, Runcorn, Cheshire, WA7 1RW
Tel: +44 (0) 1928 571850 Fax +44 (0) 1928 571852 E-mail: technical@exedy.co.uk
©EXEDY Clutch Europe Ltd | www.exedy.co.uk

